


System No. W-L-2107

October 09, 1996

F Ratings — 2 Hr

T Rating — 1 Hr

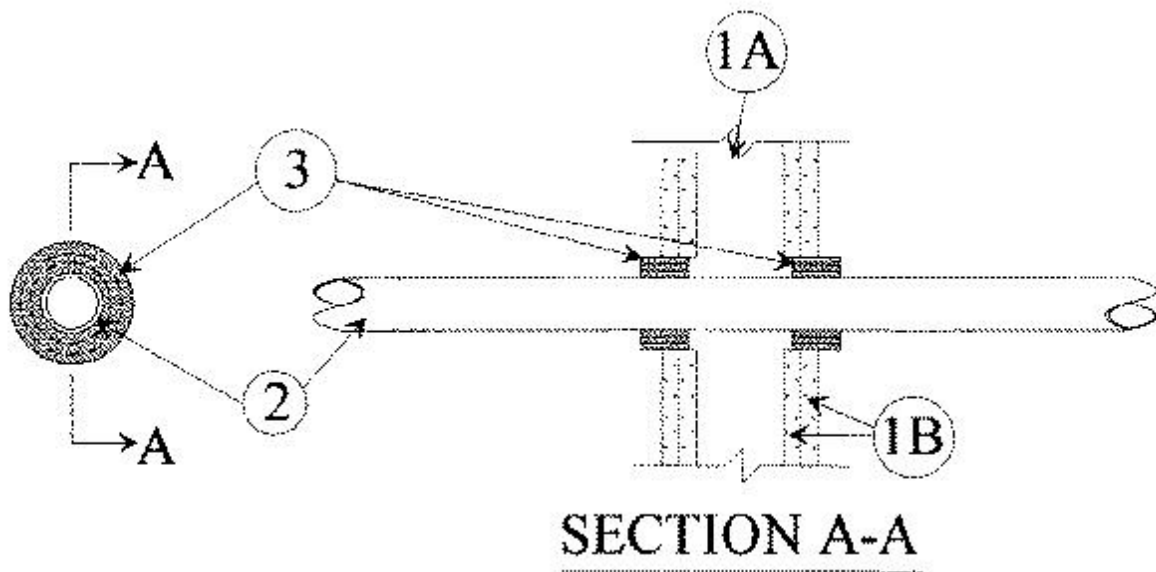

1. **Wall Assembly** — The fire-rated gypsum wallboard/stud wall assembly shall be constructed of the materials and in the manner specified in the individual U300 or U400 Series Wall and Partition Designs in the UL Fire Resistance Directory and shall include the following construction features:

A. **Studs** — Wall framing may consist of either wood studs or steel channel studs. Wood studs to consist of nom 2 by 4 in. lumber spaced 16 in. OC. Steel studs to be min 2-1/2 in. wide and spaced max 24 in. OC.

B. **Gypsum Board*** — Two layers of nom 5/8 in. thick gypsum wallboard as specified, in the individual Wall and Partition Design. Max diam of opening is 3-5/8 in.

2. **Nonmetallic Pipe** — Nom 2 in. diam (or smaller) solid or cellular core Schedule 40 acrylonitrile butadiene styrene (ABS) pipe for use in closed (process or supply) or vented (drain, waste or vent) piping systems. One pipe to be centered within the firestop system. A nom annular space of 5/8 in. is required within the firestop system. Pipe to be rigidly supported on both sides of wall assembly.

3. **Fill, Void or Cavity Material* — Wrap Strip** — Nom 1/4 in. thick by 1 in. wide intumescent wrap strip. The wrap strip is continuously wrapped around the outer circumference of the pipe three times and slid into annular space approx 3/4 in. such that approx 1/4 in. of the wrap strip protrudes from the wall surface. When multiple wrap strips are used to achieve the required total length, the ends are to be butted end-to-end and held in place with aluminum tape. Wrap strips are installed on each side of wall.

RECTORSEAL — Biostop Wrap Strip

*Bearing the UL Classification Mark